


All New Electric Series

TRUECOMP[®]
COMPRESSOR

Truly Next Generation Compressor



Energy Efficient Motor
Low Operation Cost
Easy Starting
Made for Indian Conditions

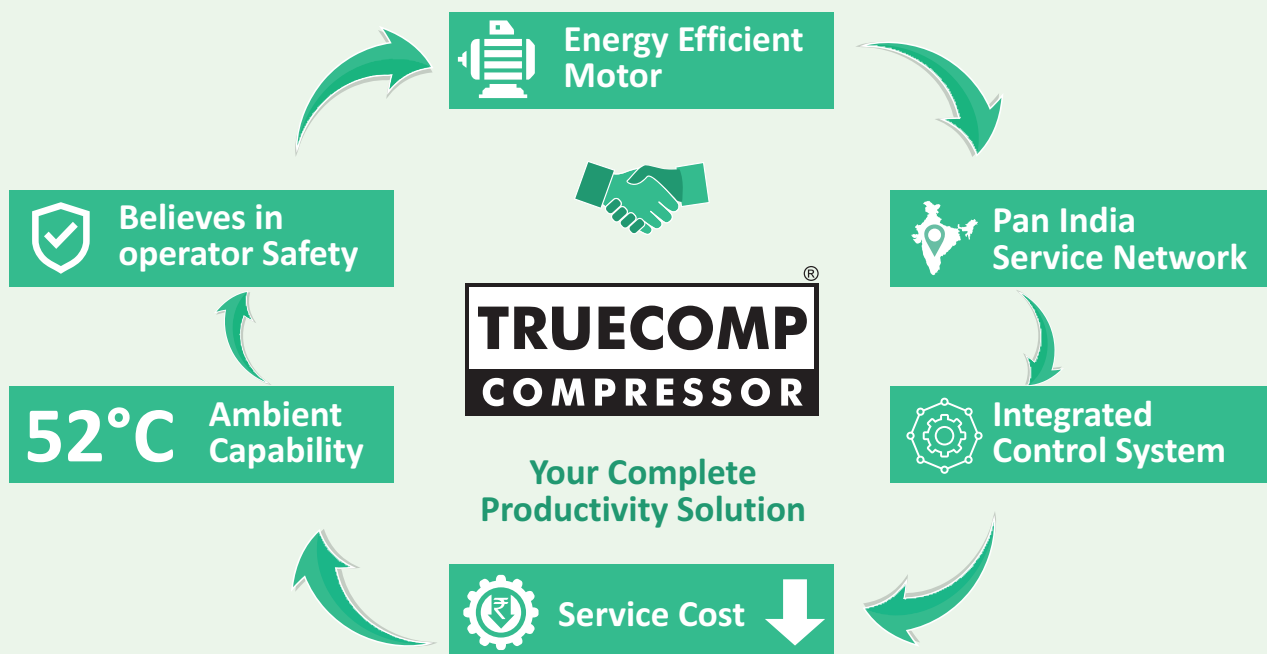

Description	Unit of Measure	Specifications		
Model	-	EC460	EL425	EL425 <i>eco</i>
General				
Free Air Delivery	CFM	460	425	425
Normal Working Pressure	PSI	115	150	185
Ambient Temperature Range	°C	5 - 52	5 - 52	5 - 52
Air Outlet Valve With Trolley (Wheeled)	-	-		-
Air Outley Valve Without Trolley (Skid/ Rig)	-	1 No of 2" & 1 No of 1/2"		-
Motor				
Output According to EN60034-1/IEC34-1	KW	75	90	90
Operating Voltage(+/- 15%)	V	415	415	415
Frequency	Hz	50	50	50
Insulation Class	-	IP54	IP54	IP23
Safety				
Emergency Stop	Yes / No	Yes	Yes	No
High Discharge Air Temperature	Yes / No	Yes	Yes	Yes
Hot Surface Protection	Yes / No	Yes	Yes	Yes
Dimension And Others				
Overall Dimention With Trolley	L X B X H, MM	3000x1350x1950	3000x1350x1950	3000x1350x1950
Overall Dimention Without Trolley (skid/ Rig)	L X B X H, MM	2000x1350x1950	2000x1350x1950	-
Dry Weight of the Package With Trolley	Kg	-	-	-
Dry Weight of the Package Without Trolley (Skid/ Rig)	Kg	1900	2750	2500
Mounting Type	Mounting	Trolley/Skid	Trolley/Skid	Trolley/Skid

Specifications and equipment subject to change without prior notice.
Consult your TrueComp Compressor customer centre for specific information

IP 54

Best in Class Protection



Service Ball Valves



Emergency Stop



Safety First



Hot Surface Protection Guards

SALES & SERVICE PARTNER :

NAKODA MACHINERY PVT. LTD.

139, 1st Floor, Patil Plaza, Mitra Mandal
Chowk, Pune 411009 (Maharashtra, INDIA)

TRUECOMP COMPRESSOR

✉ sales@truecomp.in

🌐 www.truecomp.in

☎ 8956479899, 7757015442

